

预制连接器的Profinet电缆, 4芯, 屏蔽
Profinet cable with prefabricated connector, 4 core, shielded












45B 型

RJ45, IP20插头

RJ45, IP20弯头插头

RJ45, IP67插头







| | RJB | RJB | RJB |
|-------|--|---|--|
| OE |  <p>EC-RPB-OE-45B/L00XX 31024000XX</p> |  <p>EC-RPBR-OE-45B/L00XX 31024100XX</p> |  <p>EC-RPRD-OE-45B/L00XX 31023000XX</p> |
| RPB |  <p>EC-RPB-RPB-45B/L00XX 31029500XX</p> |  <p>EC-RPBR-RPB-45B/L00XX 31022100XX</p> |  <p>EC-RPRD-RPB-45B/L00XX 31021300XX</p> |
| RPBR | |  <p>EC-RPBR-RPBR-45B/L00XX 31022200XX</p> | |
| RPRD | | |  <p>EC-RPRD-RPRD-45B/L00XX 31023300XX</p> |
| MSD |  | | |
| MRD |  | | |
| FSDBP |  <p>EC-RPB-FSDBP-45B/L00XX 31021900XX</p> | | |


此页匹配线缆参数



类型: 45B
护套: PVC
结构: 22AWG*4C 导体7根束绞
安装: 适用于活动安装
温度: -20 °C ... 80 °C

| M12针式, 直头 | M12针式, 弯头 | M12孔式, 直头 | M12孔式, 弯头 |
|---|---|--|---|
|  |  |  |  |
| MSD | MRD | FSD | FRD |
| EC-MSD-OE-45B/L00XX 31025000XX | EC-MRD-OE-45B/L00XX 31026000XX | EC-FSD-OE-45B/L00XX 31027000XX | EC-FRD-OE-45B/L00XX 31028000XX |
| EC-MSD-RPB-45B/L00XX 31029600XX | EC-MRD-RPB-45B/L00XX 31026100XX | EC-FSD-RPB-45B/L00XX 31027100XX | EC-FRD-RPB-45B/L00XX 31028100XX |
| EC-MSD-RPBR-45B/L00XX 31025200XX | EC-MRD-RPBR-45B/L00XX 31026200XX | EC-FSD-RPBR-45B/L00XX 31027200XX | EC-FRD-RPBR-45B/L00XX 31028200XX |
| EC-MSD-RPRD-45B/L00XX 31025300XX | EC-MRD-RPRD-45B/L00XX 31026300XX | EC-FSD-RPRD-45B/L00XX 31027300XX | EC-FRD-RPRD-45B/L00XX 31028300XX |
| EC-MSD-MSD-45B/L00XX 31025500XX | EC-MRD-MSD-45B/L00XX 31025600XX | EC-FSD-MSD-45B/L00XX 31025700XX | EC-FRD-MSD-45B/L00XX 31025800XX |
| | EC-MRD-MRD-45B/L00XX 31026600XX | EC-FSD-MRD-45B/L00XX 31026700XX | EC-FRD-MRD-45B/L00XX 31026800XX |
| | | | |

订购方式 (长度定制示例)

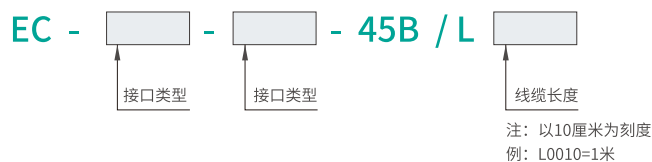

信号指示、线路分配

| M12 | RJ45 | 线芯颜色 | 信号 |
|-----|------|------|-----|
| 1 | 1 | 黄色 | TD+ |
| 3 | 2 | 橙色 | TD- |
| 2 | 3 | 白色 | RD+ |
| 4 | 6 | 蓝色 | RD- |


预制连接器的Profinet电缆, 4芯, 屏蔽
Profinet cable with prefabricated connector, 4 core, shielded

45B 型


M12针式, 金属直头

M12孔式, 金属直头




| | SD4A5 | SD4C5 |
|---|--|--|
|  RPB | EC-RPB-SD4A5-45B/L00XX 31025900XX | EC-RPB-SD4C5-45B/L00XX 31026900XX |
|  RPDB4 | EC-SD4A5-RPDB4-45B/L00XX 31020200XX | EC-SD4C5-RPDB4-45B/L00XX 31020500XX |
|  SD4A5 | EC-SD4A5-SD4A5-45B/L00XX 31020300XX | EC-SD4A5-SD4C5-45B/L00XX 31029900XX |

此页匹配线缆参数



类型: 45B
 护套: PVC
 结构: 22AWG*4C 导体7根束绞
 安装: 适用于活动安装
 温度: -20 °C ... 80 °C

订购方式 (长度定制示例)



注: 以10厘米为刻度
例: L0010=1米

信号指示、线路分配

| M12 | RJ45 | 线芯颜色 | 信号 |
|-----|------|------|-----|
| 1 | 1 | 黄色 | TD+ |
| 3 | 2 | 橙色 | TD- |
| 2 | 3 | 白色 | RD+ |
| 4 | 6 | 蓝色 | RD- |

M8预制电缆, 4芯, 屏蔽
M8 prefabricated cable, 4 cores, shielded

45B 型

M8 针式, 直头


M8 孔式, 直头

M12 针式, 直头




| | M8MS | M8FS | MSD |
|------|--------------------------------------|--------------------------------------|-------------------------------------|
| OE | EC-M8MS-OE-45B/L00XX 31022300XX | EC-M8FS-OE-45B/L00XX 31023200XX | |
| M8MS | EC-M8MS-M8MS-45B/L00XX 31023400XX | EC-M8FS-M8MS-45B/L00XX 31024300XX | EC-MSD-M8MS-45B/L00XX 31027700XX |
| RPB | EC-M8MS-RPB-45B/L00XX 31022400XX | EC-M8FS-RPB-45B/L00XX 31024200XX | |

此页匹配线缆参数



类型: 45B
护套: PVC
结构: 22AWG*4C 导体7根束绞
安装: 适用于活动安装
温度: -20 °C ... 80 °C

订购方式 (长度定制示例)



注: 以10厘米为刻度
例: L0010=1米

信号指示、线路分配

| M12 | RJ45 | 线芯颜色 | 信号 |
|-----|------|------|-----|
| 1 | 1 | 黄色 | TD+ |
| 3 | 2 | 橙色 | TD- |
| 2 | 3 | 白色 | RD+ |
| 4 | 6 | 蓝色 | RD- |