

M20 U型转换器

M20 Plastic U-Adapter, Male-Female


RoHS

IP68



技术参数/Technical data


适用温度/Ambient temperature	-20°C ~ +125°C
胶芯材料/Connector insert	PBT
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Contactor nut/screw	ASA
密封材料/密封圈/Seal/O-ring	硅胶
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
是否屏蔽/Shielding or not	否/Unavailable
插拔次数/Mating endurance	>500次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)

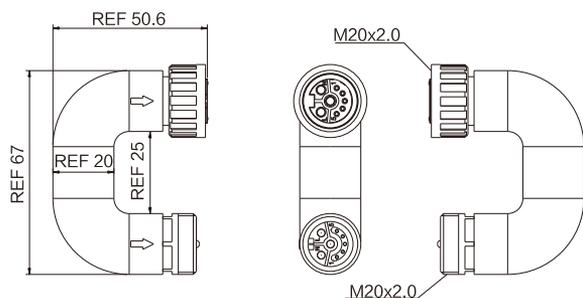

订货信息/Ordering information

芯数/Contacts	端子类型 Contacts termination	额定电流 Rated current	额定电压/Voltage		型号/Model
			交流(A/C)	直流(D/C)	
公头 母头	焊接型 Solder version	4A (信号 5Pins) 13A (电源 3Pins)	300V	300V	M20UP-MF3+5

■ 钻孔尺寸

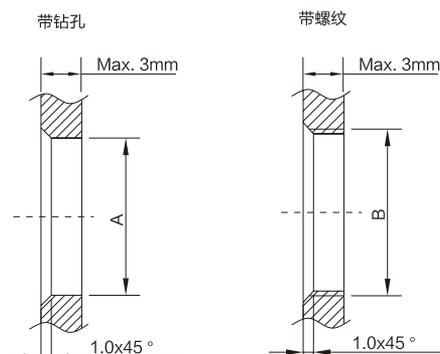

	A	B
M20	20 ^{+0.1} ₋₀	M20x1.5