

Mini-change(7/8")公/母直头, 组装式, 锁端子型, 黑色阳极铝件
Mini-change(7/8") Male/Female field wirable assembly,
Staight, Screw joint



RoHS

IP68



技术参数/Technical data

适用温度/Ambient temperature	-40°C ~ +90°C
胶芯材料/Connector insert	TPU
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Connector nut/screw	铝合金黑色阳极氧化/Aluminum anodized black
主体材料/Connector body	PA+GF
密封材料/密封圈/Seal/O-ring	FKM
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
是否屏蔽/Shielding or not	否/Unavailable
适配线径/Suitable cable dia	A: 6.0~8.0mm; B: 8.0~10.0mm
插拔次数/Mating endurance	>500次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)

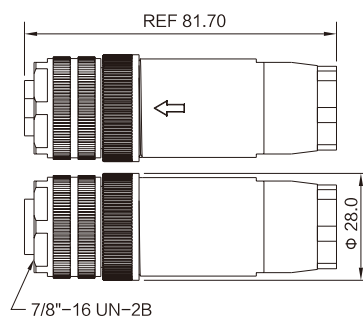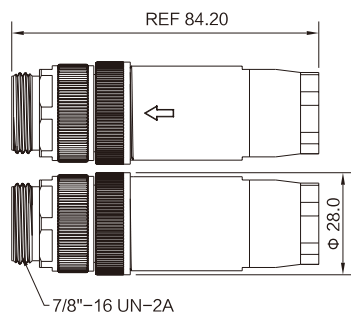

订货信息/Ordering information

芯数/Contacts	端子类型 Contacts termination	额定电流 Rated current	额定电压/Voltage		导体规格/Wire gauge		芯线绝缘 Wire insulation	公头型号/male model	母头型号/Female model
			交流(A/C)	直流(A/C)	AWG	mm ²			
	锁端子型 Screw joint	13A	300V	300V	16	1.5	PVC/定制 Customized	P5B2C-A P5B2C-B	P5B1C-A P5B1C-B
	锁端子型 Screw joint	13A	300V	300V	16	1.5	PVC/定制 Customized	P5C2C-A P5C2C-B	P5C1C-A P5C1C-B
	锁端子型 Screw joint	8A	300V	300V	16	1.5	PVC/定制 Customized	P5D2C-A P5D2C-B	P5D1C-A P5D1C-B

Mini-change(7/8")公/母弯头, 组装式, 锁端子型, 黑色阳极铝件
Mini-change(7/8") Male/Female field wirable assembly,
Angled, Screw joint



RoHS

IP68



技术参数/Technical data

适用温度/Ambient temperature	-40℃ ~ +90℃
胶芯材料/Connector insert	TPU
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Contactor nut/screw	铝合金黑色阳极氧化/Aluminum anodized black
主体材料/Connector body	PA+GF
密封材料/密封圈/Seal/O-ring	FKM
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
是否屏蔽/Shielding or not	否/Unavailable
适配线径/Suitable cable dia	A: 6.0~8.0mm; B: 8.0~10.0mm
插拔次数/Mating endurance	>500次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)

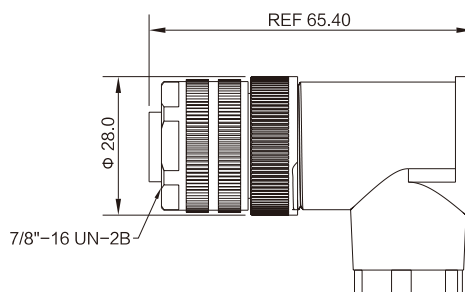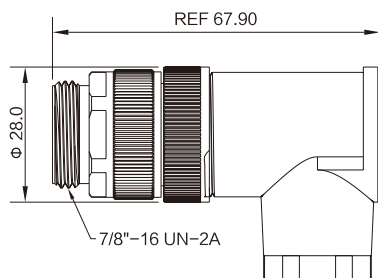

订货信息/Ordering information

芯数/Contacts		端子类型 Contacts termination	额定电流 Rated current	额定电压/Voltage		导体规格/Wire gauge		芯线绝缘 Wire insulation	公头型号/male model	母头型号/Female model
				交流(A/C)	直流(A/C)	AWG	mm ²			
		锁端子型 Screw joint	13A	300V	300V	16	1.5	PVC/定制 Customized	P5B4C-A P5B4C-B	P5B3C-A P5B3C-B
		锁端子型 Screw joint	13A	300V	300V	16	1.5	PVC/定制 Customized	P5C4C-A P5C4C-B	P5C3C-A P5C3C-B
		锁端子型 Screw joint	8A	300V	300V	16	1.5	PVC/定制 Customized	P5D4C-A P5D4C-B	P5D3C-A P5D3C-B

Mini-change(7/8")公/母直头, 组装式, 锁端子型, 压铸件
Mini-change(7/8") Male/Female field wirable assembly,
Staight, Screw termination with nut



RoHS

IP68



技术参数/Technical data

适用温度/Ambient temperature	-40℃ ~ +90℃
胶芯材料/Connector insert	TPU
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Connector nut/screw	锌合金镀镍/Zinc alloy with nickel plated
主体材料/Connector body	PA+GF
密封材料/密封圈/Seal/O-ring	FKM
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
是否屏蔽/Shielding or not	否/Unavailable
适配线径/Suitable cable dia	A: 6.0~8.0mm; B: 8.0~10.0mm
插拔次数/Mating endurance	>500次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)

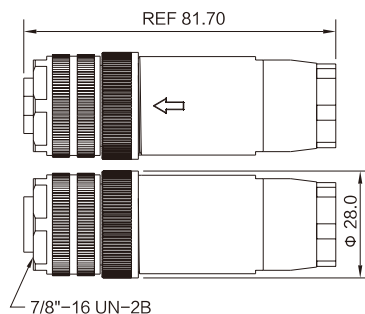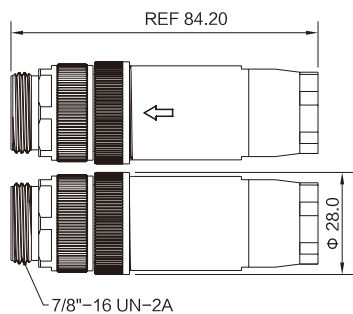

订货信息/Ordering information

芯数/Contacts	端子类型 Contacts termination	额定电流 Rated current	额定电压/Voltage		导体规格/Wire gauge		芯线绝缘 Wire insulation	公头型号/male model	母头型号/Female model
			交流(A/C)	直流(A/C)	AWG	mm ²			
	锁端子型 Screw joint	13A	300V	300V	16	1.5	PVC/定制 Customized	S5B2F-A S5B2F-B	S5B1F-A S5B1F-B
	锁端子型 Screw joint	13A	300V	300V	16	1.5	PVC/定制 Customized	S5C2F-A S5C2F-B	S5C1F-A S5C1F-B
	锁端子型 Screw joint	8A	300V	300V	16	1.5	PVC/定制 Customized	S5D2F-A S5D2F-B	S5D1F-A S5D1F-B

Mini-change(7/8")公/母弯头, 组装式, 锁端子型, 压铸件
Mini-change(7/8") Male/Female field wirable assembly,
Angled, Screw termination



RoHS

IP68



技术参数/Technical data

适用温度/Ambient temperature	-40°C ~ +90°C
胶芯材料/Connector insert	TPU
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Contactor nut/screw	锌合金镀镍/Zinc alloy with nickel plated
主体材料/Connector body	PA+GF
密封材料/密封圈/Seal/O-ring	FKM
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
是否屏蔽/Shielding or not	否/Unavailable
适配线径/Suitable cable dia	A: 6.0~8.0mm; B: 8.0~10.0mm
插拔次数/Mating endurance	>500次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)

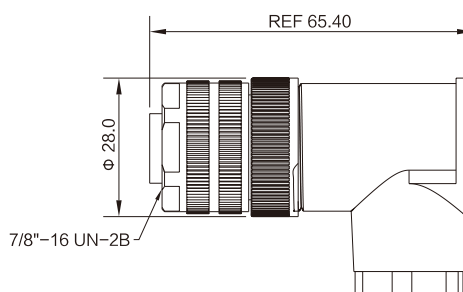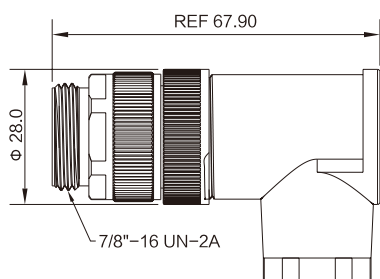

订货信息/Ordering information

芯数/Contacts	端子类型 Contacts termination	额定电流 Rated current	额定电压/Voltage		导体规格/Wire gauge		芯线绝缘 Wire insulation	公头型号/male model	母头型号/Female model
			交流(A/C)	直流(A/C)	AWG	mm ²			
	锁端子型 Screw joint	13A	300V	300V	16	1.5	PVC/定制 Customized	S5B4F-A S5B4F-B	S5B3F-A S5B3F-B
	锁端子型 Screw joint	13A	300V	300V	16	1.5	PVC/定制 Customized	S5C4F-A S5C4F-B	S5C3F-A S5C3F-B
	锁端子型 Screw joint	8A	300V	300V	16	1.5	PVC/定制 Customized	S5D4F-A S5D4F-B	S5D3F-A S5D3F-B

Mini-change(7/8")公/母直头, 组装式, 锁端子型, 压铸件,带装配定位孔
Mini-change(7/8") Male/Female field wirable assembly,
Staight, Screw termination with pilot hole



RoHS

IP68



技术参数/Technical data

适用温度/Ambient temperature	-40°C ~ +90°C
胶芯材料/Connector insert	TPU
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Contactor nut/screw	锌合金镀镍/Zinc alloy with nickel plated
主体材料/Connector body	PA+GF
密封材料/密封圈/Seal/O-ring	FKM
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
是否屏蔽/Shielding or not	否/Unavailable
适配线径/Suitable cable dia	A: 6.0~8.0mm; B: 8.0~10.0mm
插拔次数/Mating endurance	>500次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)

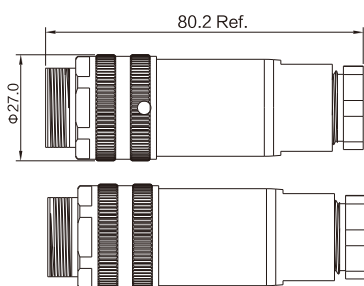

订货信息/Ordering information

芯数/Contacts	端子类型 Contacts termination	额定电流 Rated current	额定电压/Voltage		导体规格/Wire gauge		芯线绝缘 Wire insulation	公头型号/male model	母头型号/Female model
			交流(A/C)	直流(A/C)	AWG	mm ²			
	锁端子型 Screw joint	13A	300V	300V	16	1.5	PVC/定制 Customized	S5B2F-A(带定位) S5B2F-B(带定位)	S5B1F-A(带定位) S5B1F-B(带定位)
	锁端子型 Screw joint	13A	300V	300V	16	1.5	PVC/定制 Customized	S5C2F-A (带定位) S5C2F-B(带定位)	S5C1F-A(带定位) S5C1F-B(带定位)
	锁端子型 Screw joint	8A	300V	300V	16	1.5	PVC/定制 Customized	S5D2F-A(带定位) S5D2F-B(带定位)	S5D1F-A(带定位) S5D1F-B(带定位)