

Mini-change(7/8")公头终端器 Mini-change(7/8") Male Terminator



RoHS

IP68



技术参数/Technical data

适用温度/Ambient temperature	-25°C ~ +90°C
胶芯材料/Connector insert	TPU
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Contact nut/screw	铝合金黑色阳极氧化/Aluminum anodized black
外模材料/Connector overmold	TPU
密封材料/密封圈/Seal/O-ring	氟橡胶(FKM)
绝缘阻抗/Insulation resistance	≥ 100MΩ
接触阻抗/Contact resistance	≤ 5mΩ
是否屏蔽/Shielding or not	否/Unavailable
插拔次数/Mating endurance	> 500次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)

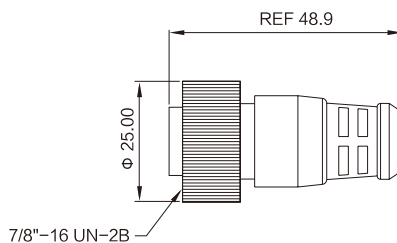

订货信息/Ordering information

芯数/Contacts		额定电流 Rated current	额定电压/Voltage		导体规格/Wire gauge		公头型号/male model	母头型号/Female model
			交流(A/C)	直流(A/C)	AWG	mm ²		
		13A	300V	300V	18	1.0	MINI- P5B2R	MINI- P5B1R
		13A	300V	300V	18	1.0	MINI- P5C2R	MINI- P5C1R
		8A	300V	300V	20	0.5	MINI- P5D2R	MINI- P5D1R
		4A	250V	250V	24	0.25	MINI- P5I2R	MINI- P5I1R