

RD24 公/母直头, 注塑成型式
RD24 Male/Female molded cable, Straight



RoHS

IP68



技术参数/Technical data

适用温度/Ambient temperature	-40°C ~ +80°C(静态温度/fixed installation); -20°C ~ +80°C(动态温度/flexible installation)
胶芯材料/Connector insert	PBT
端子材料/Connector contacts	黄铜镀银/Brass with silver plated
螺丝/螺母材料/Connector nut/screw	PA
密封材料/密封圈/Seal/O-ring	环氧树脂 (Epoxy resin) /EPDM
绝缘阻抗/Insulation resistance	≥ 100MΩ
接触阻抗/Contact resistance	≤ 5mΩ
是否屏蔽/Shielding or not	否/Unavailable
插拔次数/Mating endurance	> 500次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)

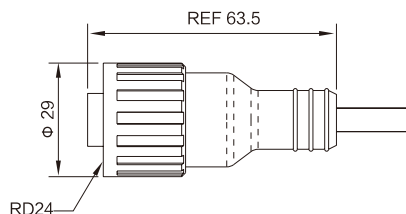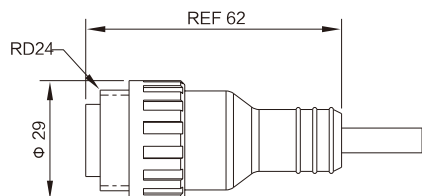

订货信息/Ordering information

芯数/Contacts		额定电流 Rated current	额定电压/Voltage		导体规格/Wire gauge		线材外被 Cable jacket	公头型号/male model	母头型号/Female model
			交流(A/C)	直流(A/C)	AWG	mm ²			
		12A	600V	600V	18~14	0.75	PVC/PUR	VP24-2P-MAH-XXXX	VP24-2P-FAH-XXXX
		12A	600V	600V	18~14	0.75	PVC/PUR	VP24-3P-MAH-XXXX	VP24-3P-FAH-XXXX
		12A	600V	600V	18~14	0.75	PVC/PUR	VP24-4P-MAH-XXXX	VP24-4P-FAH-XXXX
		8A	250V	250V	22~16	0.34~1.5	PVC/PUR	VP24-7P-MAH-XXXX	VP24-7P-FAH-XXXX