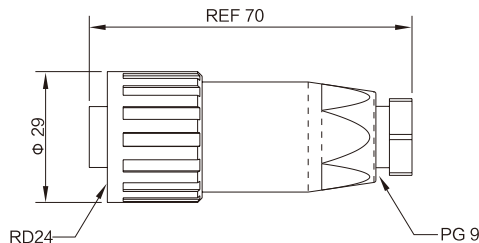
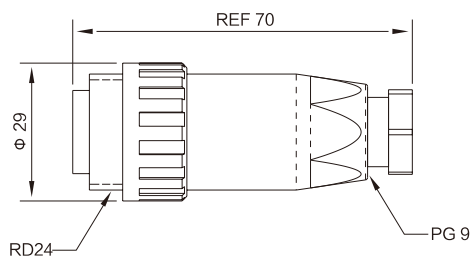


RD24 公/母直头, 组装式, 焊接型
RD24 Male/Female Field wirable assembly, Straight, Solder
RoHS
IP68

技术参数/Technical data

适用温度/Ambient temperature	-25°C ~ +125°C
胶芯材料/Connector insert	PBT
端子材料/Connector contacts	黄铜镀银/Brass with silver plated
螺丝/螺母材料/Contactor nut/screw	PA
密封材料/密封圈/Seal/O-ring	环氧树脂 (Epoxy resin) /EPDM
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
是否屏蔽/Shielding or not	否/Unavailable
适配线径/Suitable cable dia	PG9: 6~8mm
插拔次数/Mating endurance	>500次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)


订货信息/Ordering information

芯数/Contacts		端子类型 Contacts termination	额定电流 Rated current	额定电压/Voltage		导体规格/Wire gauge		线材外被 Cable jacket	公头型号/ male model	母头型号/ Female model
				交流(A/C)	直流(A/C)	AWG	mm ²			
		焊接型 Solder version	12A	600V	600V	18~14	0.75	PVC/PUR	P24A2A05	P24A1A05
		焊接型 Solder version	12A	600V	600V	18~14	0.75	PVC/PUR	P24B2A05	P24B1A05
		焊接型 Solder version	12A	600V	600V	18~14	0.75	PVC/PUR	P24C2A05	P24C1A05
		焊接型 Solder version	8A	250V	250V	22~16	0.34~1.5	PVC/PUR	P2472A05	P2471A05