

Mini-Din 公直头, 注塑成型式 Mini-Din Male molded cable, Straight


RoHS

IP67



技术参数/Technical data

适用温度/Ambient temperature	-20°C ~ +80°C
胶芯材料/Connector insert	PBT
端子材料/Connector contacts	黄铜镀银/Brass with silver plated
外模材料/Connector overmold	PU
螺丝/螺母材料/Connector nut/screw	PA+GF
密封材料/密封圈/Seal/O-ring	氟橡胶 (FKM)
绝缘阻抗/Insulation resistance	≥20MΩ
接触阻抗/Contact resistance	≤20mΩ
是否屏蔽/Shielding or not	是/Available
防护等级/IP rating	IP67 (锁紧状态/in locked condition)

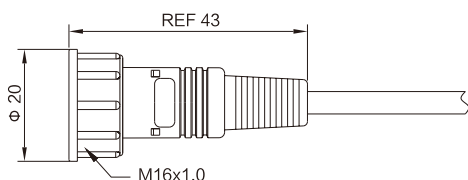



订货信息/Ordering information

芯数/Contacts	电压(额定电流)/Voltage(Rated current)		导体规格/Wire gauge		线材外被 Cable jacket	芯线绝缘 Wire insulation	公头型号/male model
	交流(A/C)	直流(A/C)	AWG	mm ²			
	100V(1.0A)	12V(1.5A)	24	0.25	PUR / PVC	PVC	P-VE16-3P-MA
	100V(1.0A)	12V(1.5A)	24	0.25	PUR / PVC	PVC	P-VE16-4P-MA
	100V(1.0A)	12V(1.5A)	24	0.25	PUR / PVC	PVC	P-VE16-5P-MA
	100V(1.0A)	12V(1.5A)	24	0.25	PUR / PVC	PVC	P-VE16-6P-MA
	100V(1.0A)	12V(1.5A)	24	0.25	PUR / PVC	PVC	P-VE16-7P-MA
	100V(1.0A)	12V(1.5A)	24	0.25	PUR / PVC	PVC	P-VE16-8P-MA
	100V(1.0A)	12V(1.5A)	24	0.25	PUR / PVC	PVC	P-VE16-9P-MA

Mini-Din 母直头, 注塑成型式
Mini-Din Female molded cable, Straight

RoHS

IP67

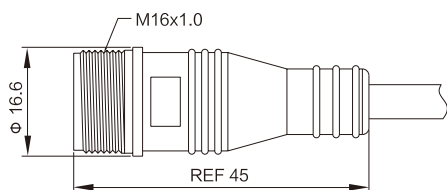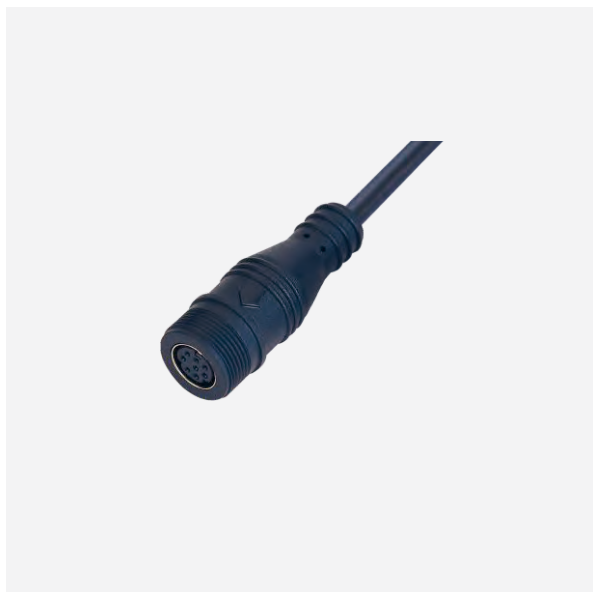

技术参数/Technical data

适用温度/Ambient temperature	-20°C ~ +80°C
胶芯材料/Connector insert	PBT
端子材料/Connector contacts	黄铜镀银/Brass with silver plated
外模材料/Connector overmold	PU
螺丝/螺母材料/Connector nut/screw	PA+GF
绝缘阻抗/Insulation resistance	≥20MΩ
接触阻抗/Contact resistance	≤20mΩ
是否屏蔽/Shielding or not	是/Available
防护等级/IP rating	IP67 (锁紧状态/in locked condition)


订货信息/Ordering information

芯数/Contacts	电压(额定电流)/Voltage(Rated current)		导体规格/Wire gauge		线材外被 Cable jacket	芯线绝缘 Wire insulation	母头型号/Female model
	交流(A/C)	直流(A/C)	AWG	mm ²			
	100V(1.0A)	12V(1.5A)	24	0.25	PUR / PVC	PVC	P-VE16-3P-FA
	100V(1.0A)	12V(1.5A)	24	0.25	PUR / PVC	PVC	P-VE16-4P-FA
	100V(1.0A)	12V(1.5A)	24	0.25	PUR / PVC	PVC	P-VE16-5P-FA
	100V(1.0A)	12V(1.5A)	24	0.25	PUR / PVC	PVC	P-VE16-6P-FA
	100V(1.0A)	12V(1.5A)	24	0.25	PUR / PVC	PVC	P-VE16-7P-FA
	100V(1.0A)	12V(1.5A)	24	0.25	PUR / PVC	PVC	P-VE16-8P-FA
	100V(1.0A)	12V(1.5A)	24	0.25	PUR / PVC	PVC	P-VE16-9P-FA

Mini-Din 母头, 面板式, 焊接型, 前锁
Mini-Din Female panel mount, Solder, Front fastened



RoHS

IP67

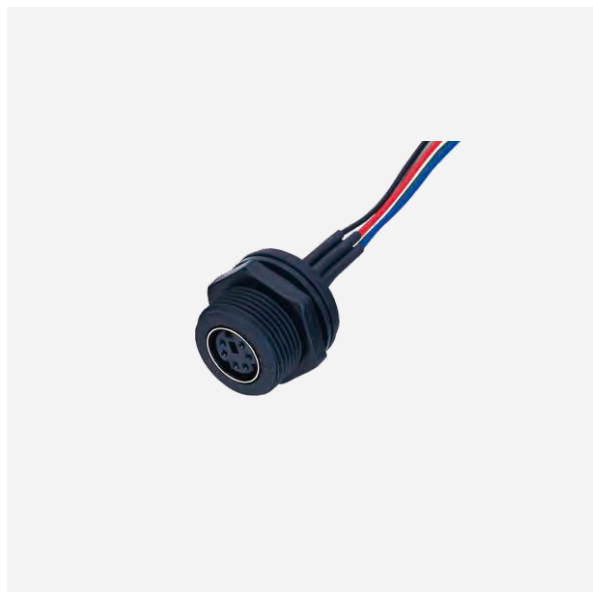

技术参数/Technical data

适用温度/Ambient temperature	-20°C ~ +80°C
胶芯材料/Connector insert	PBT
端子材料/Connector contacts	黄铜镀银/Brass with silver plated
螺丝/螺母材料/Contact nut/screw	PA+GF
密封材料/密封圈/Seal/O-ring	氟橡胶 (FKM)
绝缘阻抗/Insulation resistance	≥20MΩ
接触阻抗/Contact resistance	≤20mΩ
是否屏蔽/Shielding or not	是/Available
防护等级/IP rating	IP67 (锁紧状态/in locked condition)

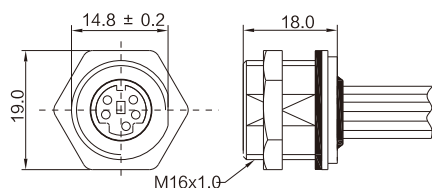

Panel Cut-out

订货信息/Ordering information

芯数/Contacts	电压(额定电流)/Voltage(Rated current)		导体规格/Wire gauge		芯线绝缘 Wire insulation	母头型号/Female model
	交流(A/C)	直流(A/C)	AWG	mm ²		
	100V(1.0A)	12V(1.5A)	24	0.25	PVC/定制Customized	M16MAP03P-Q3
	100V(1.0A)	12V(1.5A)	24	0.25	PVC/定制Customized	M16MAP04P-Q3
	100V(1.0A)	12V(1.5A)	24	0.25	PVC/定制Customized	M16MAP05P-Q3
	100V(1.0A)	12V(1.5A)	24	0.25	PVC/定制Customized	M16MAP06P-Q3
	100V(1.0A)	12V(1.5A)	24	0.25	PVC/定制Customized	M16MAP07P-Q3
	100V(1.0A)	12V(1.5A)	24	0.25	PVC/定制Customized	M16MAP08P-Q3
	100V(1.0A)	12V(1.5A)	24	0.25	PVC/定制Customized	M16MAP09P-Q3