

RJ45 公直头, 注塑成型式
RJ45 Male molded cable, Straight


RoHS

IP67



技术参数/Technical data

适用温度/Ambient temperature	-20°C ~ +60°C
胶芯材料/Connector insert	PC
端子材料/Connector contacts	铜合金镀金/Brass with silver plated
外模材料/Connector overmold	TPU
螺丝/螺母材料/Connector nut/screw	PA+GF
密封材料/密封圈/Seal/O-ring	氟橡胶 (FKM)
绝缘阻抗/Insulation resistance	≥ 100MΩ
接触阻抗/Contact resistance	≤ 30mΩ
防护等级/IP rating	IP67 (锁紧状态/in locked condition)

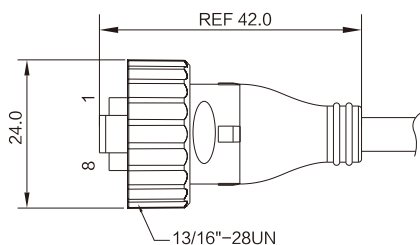

订货信息/Ordering information

芯数/Contacts	额定电流/ Rated current	额定电压/Voltage		导体规格/Wire gauge		线材外被 Cable jacket	芯线绝缘 Wire insulation	公头型号/male model
		交流(A/C)	直流(A/C)	AWG	mm ²			
RJ45 8P8C  公头	1.5A	125V	125V	24	0.25	PVC	PE	RJ45-P-VE16-8P-MA

RJ45 公直头, 组装式, 压接型

RJ45 Male Field wirable assembly, Straight


RoHS

IP67



技术参数/Technical data

适用温度/Ambient temperature	-20℃ ~ +60℃
胶芯材料/Connector insert	PC
端子材料/Connector contacts	铜合金镀金/Brass with silver plated
主体材料/Connector overmold	PA+GF
螺丝/螺母材料/Contactor nut/screw	PA+GF
密封材料/密封圈/Seal/O-ring	氟橡胶（FKM）
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤30mΩ
是否屏蔽/Shielding or not	是/Available
防护等级/IP rating	IP67（锁紧状态/in locked condition）

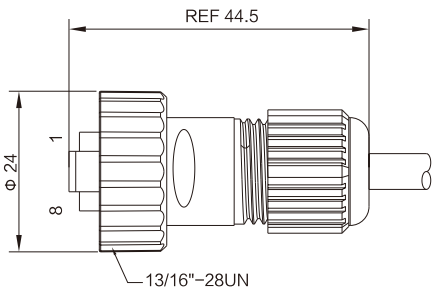

订货信息/Ordering information

芯数/Contacts	额定电流/ Rated current	额定电压/Voltage		导体规格/Wire gauge		线材外被 Cable jacket	芯线绝缘 Wire insulation	公头型号/male model
		交流(A/C)	直流(A/C)	AWG	mm ²			
RJ45 8P8C  公头	1.5A	125V	125V	24	0.25	PVC	PE	RJ45-1316MAY08P

RJ45 母头, 面板式, 前锁

RJ45 Female panel mount, Front fastened


RoHS

IP67




技术参数/Technical data

适用温度/Ambient temperature	-20°C ~ +80°C
胶芯材料/Connector insert	PBT+GF
端子材料/Connector contacts	磷青铜镀金/Phosphor bronze with gold plated
螺丝/螺母材料/Connector nut/screw	PA+GF
密封材料/密封圈/Seal/O-ring	氟橡胶 (FKM)
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤30mΩ
是否屏蔽/Shielding or not	是/Available
防护等级/IP rating	IP67 (锁紧状态/in locked condition)

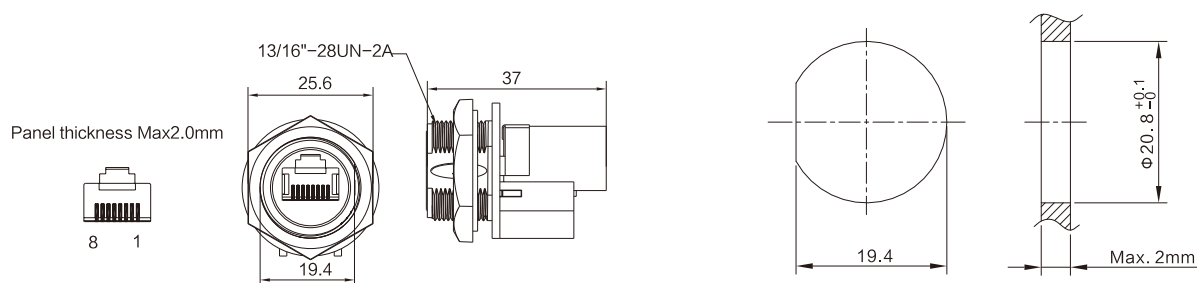

订货信息/Ordering information

芯数/Contacts	额定电流/ Rated current	额定电压/Voltage		母头型号/Female model
		交流(A/C)	直流(D/C)	
 母头	1.5A	125V	125V	RJ45-1316FAP-Q