

UHF 防水连接器, 焊接型


Waterproof UHF connector

RoHS

IP65



适用温度/Ambient temperature	-30℃ ~ +85℃
胶芯材料/Connector insert	PTFE
端子材料/Connector contacts	黄铜镀镍/Brass with nickel plated
螺丝/螺母材料/Contactor nut/screw	PA+GF
密封材料/Seal	环氧树脂/Epoxy resin
绝缘阻抗/Insulation resistance	≥10MΩ
接触阻抗/Contact resistance	≤5mΩ
是否屏蔽/Shielding or not	是/Available
防护等级/IP rating	IP65（锁紧/in locked condition）

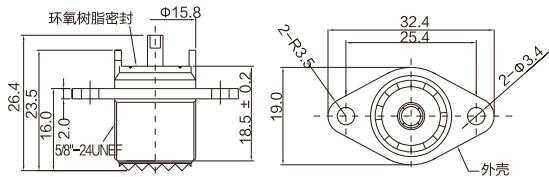

订货信息/Ordering information

芯数/Contacts	端子类型/ Contacts termination	额定电流/ Rated current	额定电压/Voltage		型号/Model
			交流(A/C)	直流(A/C)	
	焊接型/ Solder version	1A	250V	250V	UHF-H