


D-Sub 公头, 面板式, 焊接型, 前锁

D-Sub Male panel mount, Solder, Front fastened


RoHS

IP67

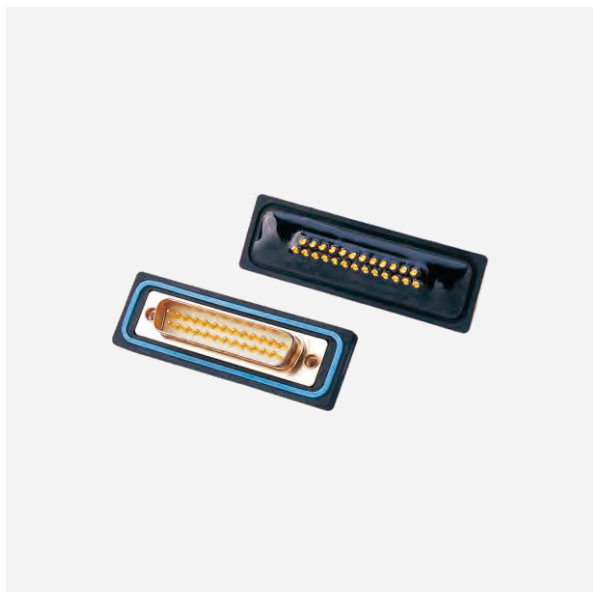

技术参数/Technical data

适用温度/Ambient temperature	-25°C ~ +70°C
胶芯材料/Connector insert	PBT+GF
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Contact nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	氟橡胶 (FKM)
绝缘阻抗/Insulation resistance	≥1000MΩ
接触阻抗/Contact resistance	≤10mΩ
是否屏蔽/Shielding or not	否/Unavailable
防护等级/IP rating	IP67 (锁紧状态/in locked condition)

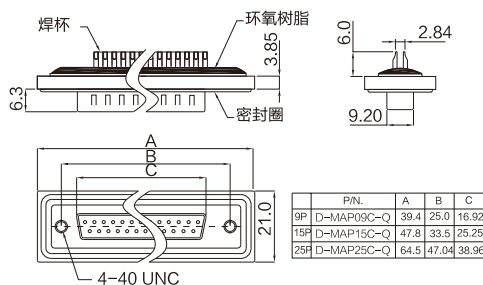

订货信息/Ordering information

芯数/Contacts	端子类型/ Contacts termination	额定电流/ Rated current	额定电压/Voltage		公头型号/Male model
			交流(A/C)	直流(D/C)	
	焊接型/ Solder version	5A	300V	300V	D-MAP09C-Q
	焊接型/ Solder version	5A	300V	300V	D-MAP15C-Q
	焊接型/ Solder version	5A	300V	300V	D-MAP25C-Q

D-Sub 母头, 面板式, 焊接型, 前锁
D-Sub Female panel mount, Solder, Front fastened


RoHS

IP67



技术参数/Technical data

适用温度/Ambient temperature	-25°C ~ +70°C
胶芯材料/Connector insert	PBT+GF
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Contact nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	氟橡胶 (FKM)
绝缘阻抗/Insulation resistance	≥1000MΩ
接触阻抗/Contact resistance	≤10mΩ
是否屏蔽/Shielding or not	否/Unavailable
防护等级/IP rating	IP67 (锁紧状态/in locked condition)

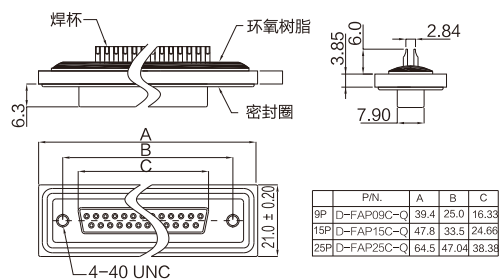

订货信息/Ordering information

芯数/Contacts	端子类型/ Contacts termination	额定电流/ Rated current	额定电压/Voltage		母头型号/Female model
			交流(A/C)	直流(A/C)	
	焊接型/ Solder version	5A	300V	300V	D-FAP09C-Q
	焊接型/ Solder version	5A	300V	300V	D-FAP15C-Q
	焊接型/ Solder version	5A	300V	300V	D-FAP25C-Q

D-Sub 公头, 面板式, 焊接型, 前锁

D-Sub Male panel mount, Solder, Front fastened


RoHS

IP67



技术参数/Technical data

适用温度/Ambient temperature	-25°C ~ +70°C
胶芯材料/Connector insert	PBT+GF
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Contactor nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	氟橡胶 (FKM)
绝缘阻抗/Insulation resistance	≥ 1000MΩ
接触阻抗/Contact resistance	≤ 10mΩ
是否屏蔽/Shielding or not	否/Unavailable
防护等级/IP rating	IP67 (锁紧状态/in locked condition)

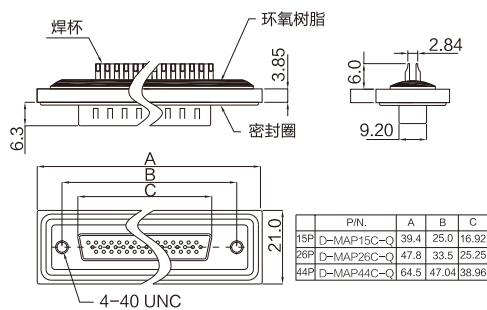


订货信息/Ordering information

芯数/Contacts	端子类型/ Contacts termination	额定电流/ Rated current	额定电压/Voltage		公头型号/Male model
			交流(A/C)	直流(D/C)	
	焊接型/ Solder version	5A	300V	300V	D-MAP15C-Q
	焊接型/ Solder version	5A	300V	300V	D-MAP26C-Q
	焊接型/ Solder version	5A	300V	300V	D-MAP44C-Q

D-Sub 公头, 面板式, PCB型, 前锁
D-Sub Male panel mount, PCB type, Front fastened


RoHS

IP67

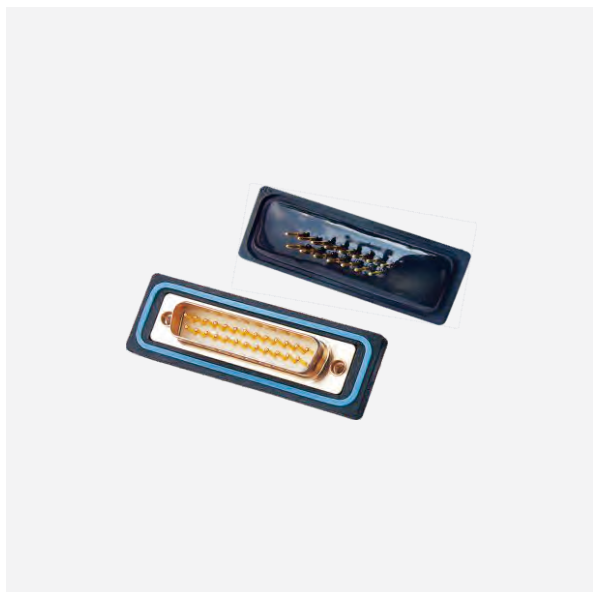

技术参数/Technical data

适用温度/Ambient temperature	-25°C ~ +70°C
胶芯材料/Connector insert	PBT+GF
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Contact nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	氟橡胶 (FKM)
绝缘阻抗/Insulation resistance	≥1000MΩ
接触阻抗/Contact resistance	≤10mΩ
是否屏蔽/Shielding or not	否/Unavailable
防护等级/IP rating	IP67 (锁紧状态/in locked condition)

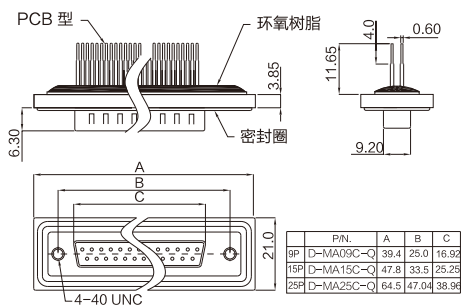

订货信息/Ordering information

芯数/Contacts	端子类型/ Contacts termination	额定电流/ Rated current	额定电压/Voltage		公头型号/Male model
			交流(A/C)	直流(D/C)	
	PCB型/ PCB version	5A	300V	300V	D-MA09C-Q
	PCB型/ PCB version	5A	300V	300V	D-MA15C-Q
	PCB型/ PCB version	5A	300V	300V	D-MA25C-Q

D-Sub 母头, 面板式, PCB型, 前锁

D-Sub Female panel mount, PCB type, Front fastened


RoHS

IP67



技术参数/Technical data

适用温度/Ambient temperature	-25°C ~ +70°C
胶芯材料/Connector insert	PBT+GF
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Connector nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	氟橡胶 (FKM)
绝缘阻抗/Insulation resistance	≥1000MΩ
接触阻抗/Contact resistance	≤10mΩ
是否屏蔽/Shielding or not	否/Unavailable
防护等级/IP rating	IP67 (锁紧状态/in locked condition)

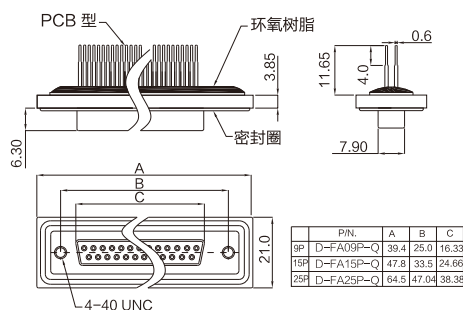

订货信息/Ordering information


芯数/Contacts	端子类型/ Contacts termination	额定电流/ Rated current	额定电压/Voltage		母头型号/Female model
			交流(A/C)	直流(D/C)	
	PCB型/ PCB version	5A	300V	300V	D-FA09P-Q
	PCB型/ PCB version	5A	300V	300V	D-FA15P-Q
	PCB型/ PCB version	5A	300V	300V	D-FA25P-Q

D-Sub 公头, 面板式, PCB型, 弯针

D-Sub Male panel mount, Angled contacts PCB type


RoHS

IP67

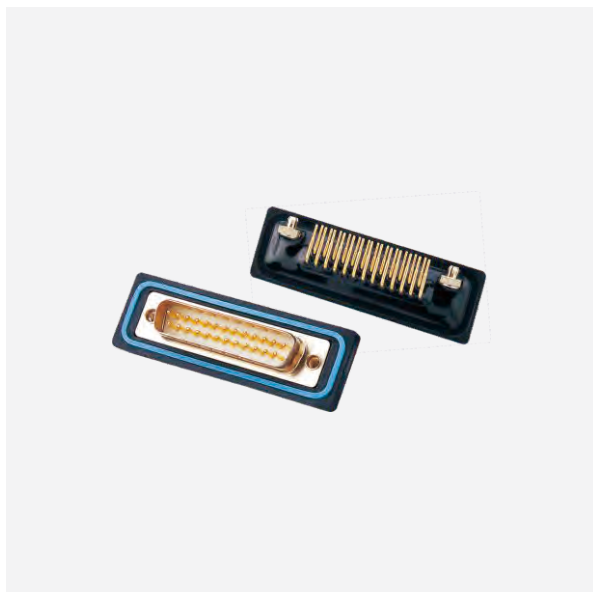

技术参数/Technical data

适用温度/Ambient temperature	-25°C ~ +70°C
胶芯材料/Connector insert	PBT+GF
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Contact nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	氟橡胶 (FKM)
绝缘阻抗/Insulation resistance	≥1000MΩ
接触阻抗/Contact resistance	≤10mΩ
是否屏蔽/Shielding or not	否/Unavailable
防护等级/IP rating	IP67 (锁紧状态/in locked condition)

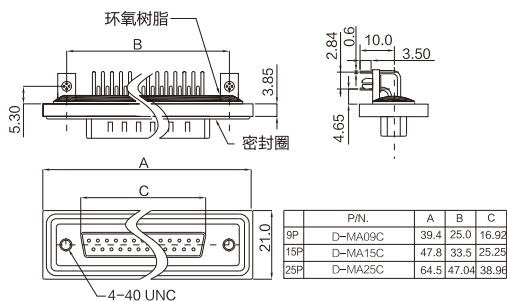

订货信息/Ordering information

芯数/Contacts	端子类型/ Contacts termination	额定电流/ Rated current	额定电压/Voltage		公头型号/Male model
			交流(A/C)	直流(A/C)	
	PCB型/ PCB version	5A	300V	300V	D-MA09C
	PCB型/ PCB version	5A	300V	300V	D-MA15C
	PCB型/ PCB version	5A	300V	300V	D-MA25C

D-Sub 母头, 面板式, PCB型, 弯针

D-Sub Female panel mount, Angled contacts PCB type


RoHS

IP67



技术参数/Technical data

适用温度/Ambient temperature	-25°C ~ +70°C
胶芯材料/Connector insert	PBT+GF
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Contactor nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	氟橡胶 (FKM)
绝缘阻抗/Insulation resistance	≥1000MΩ
接触阻抗/Contact resistance	≤10mΩ
是否屏蔽/Shielding or not	否/Unavailable
防护等级/IP rating	IP67 (锁紧状态/in locked condition)

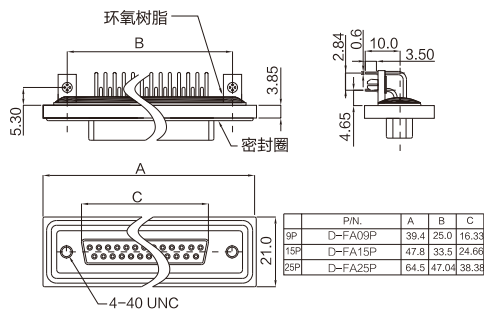

订货信息/Ordering information

芯数/Contacts	端子类型/ Contacts termination	额定电流/ Rated current	额定电压/Voltage		母头型号/Female model
			交流(A/C)	直流(A/C)	
	PCB型/ PCB version	5A	300V	300V	D-FA09P
	PCB型/ PCB version	5A	300V	300V	D-FA15P
	PCB型/ PCB version	5A	300V	300V	D-FA25P

D-SUB 7W2 公头, 面板式, PCB型, 弯针

D-Sub Male panel mount, Angled contacts PCB type


RoHS

IP67




技术参数/Technical data

适用温度/Ambient temperature	-20°C ~ +70°C
胶芯材料/Connector insert	PBT+GF
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Contactor nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	氟橡胶 (FKM)
绝缘阻抗/Insulation resistance	≥ 1000MΩ
接触阻抗/Contact resistance	≤ 10mΩ
是否屏蔽/Shielding or not	否/Unavailable
防护等级/IP rating	IP67 (锁紧状态/in locked condition)

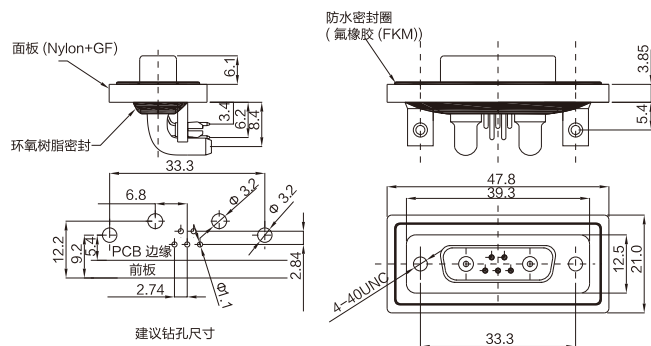

订货信息/Ordering information

芯数/Contacts	端子类型/ Contacts termination	额定电流/ Rated current	额定电压/Voltage		公头型号/Male model
			交流(A/C)	直流(D/C)	
 7W2	PCB型/ PCB version	(PinA1&A2)30A	300V	300V	D-MA05Z
	PCB型/ PCB version	(Pin1~5)5A	300V	300V	

D-SUB 公/母头, 组装式
D-Sub Field wirable assembly


RoHS

IP67



技术参数/Technical data

适用温度/Ambient temperature	-25℃ ~ +70℃
胶芯材料/Connector insert	PBT+GF
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Contact nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	氟橡胶 (FKM)
绝缘阻抗/Insulation resistance	≥1000MΩ
接触阻抗/Contact resistance	≤10mΩ
是否屏蔽/Shielding or not	否/Unavailable
防护等级/IP rating	IP67 (锁紧状态/in locked condition)

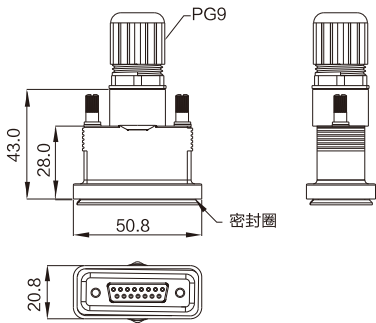

订货信息/Ordering information

芯数/Contacts	额定电流/ Rated current	额定电压/Voltage		型号/Model
		交流(A/C)	直流(A/C)	
 公头	5A	300V	300V	D-MA15Z
 母头	5A	300V	300V	D-FA15Z