

ISO-BUS 插头, 面板式, 快锁式
ISO-BUS Plug Panel mount, Quick-lock type


RoHS

IP65



技术参数/Technical data

执行标准/Standard	ISO 11783-2
适用温度/Ambient temperature	-25°C ~ +85°C
胶芯材料/Connector insert	PA+GF
端子材料/Connector contacts	Pin1,2,3&4 黄铜镀镍/Brass with nickel plated Pin5,6,7,8&9 黄铜镀金/Brass with gold plated
外模颜色/Color	Blue
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤20mΩ
外模材料/Overmolding	TPU
密封材料/Sealing	硅胶/Silicon
插拔次数/Mating endurance	≥100
耐腐蚀性/Corrosion resistance	48小时盐雾测试/48H salt spray test
防护等级/IP rating	IP65 (锁紧状态/in locked condition)

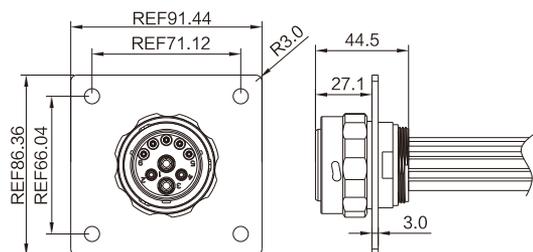

订货信息/Ordering information

芯数/Contacts	Pin	额定电流 Rated current	额定电压/Voltage		线材规格/Cable specification
			交流(A/C)	直流(D/C)	
 ISO-MA-09Q	1&3	40A	60V	60V	UI1015 6.0mm ² wire(BC)
	2&4	18A	60V	60V	UL1015 2.5mm ² wire(BC)
	5~9	7A	60V	60V	UL1015 0.5mm ² wire(BC)