M8 分线盒, 8位, 带线
Junction Box, 8 Ports, M8 Termination, Molded cable

RoHS IP67

技术参数/Technical data

适用温度/Ambient temperature	-40°C ~ +80°C(静态温度/fixed installation);
	-20°C ~ +80°C(动态温度/flexible installation)
胶芯材料/Connector insert	TPU
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
主体材料/Connector body	PBT
螺丝/螺母材料/Contactor nut/screw	黄铜镀镍/Brass with nickel plated
主体颜色/Body color	蓝/blue
密封材料/Seal	氟橡胶/FKM
接触阻抗/Contact resistance	≤3mΩ
额定电压 带/不带LED with/without LED	10~30/120V
额定电流/Rated current	1A(信号/Per signal)，3A(总电流/Total)
LED颜色/LED Color	可定制/Optional
防护等级/IP rating	IP67（锁紧状态/in locked condition）

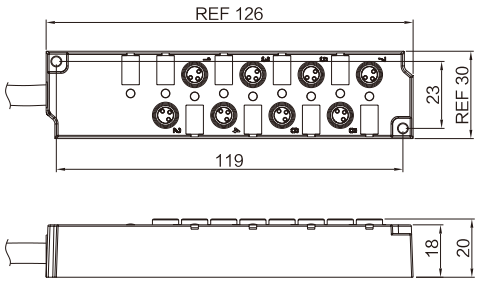

订货信息/Ordering information

芯数/Contacts	线路图/Circuit diagram	线材规格/ Cable specification	型号/Model
PIN位分布 M8(母)	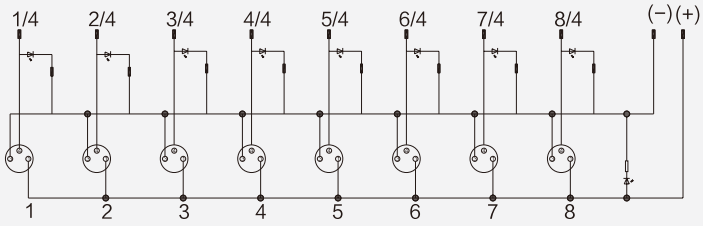	电缆: 8*0.25mm2(24AWG) 2*0.5mm2(20AWG) PUR/PVC 外披, 可定制	M8381-1/XX(带LED) M8380-1/XX(不带LED)

M8 分线盒, 8位, 带M12
Junction Box, 8 Ports, M8 Termination, With M12 Connector

RoHS IP67

技术参数/Technical data

适用温度/Ambient temperature	-25℃ ~ +80℃
胶芯材料/Connector insert	TPU
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
主体材料/Connector body	PBT
螺丝/螺母材料/Contactor nut/screw	黄铜镀镍/Brass with nickel plated
主体颜色/Body color	蓝/blue
密封材料/Seal	氟橡胶/FKM
接触阻抗/Contact resistance	≤3mΩ
额定电压 带/不带LED with/without LED	10~30/120V
额定电流/Rated current	1A(信号/Per signal)，3A(总电流/Total)
LED颜色/LED Color	可定制/Optional
防护等级/IP rating	IP67（锁紧状态/in locked condition）

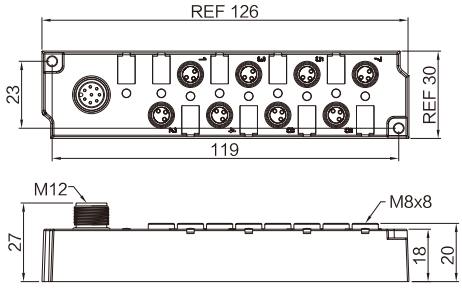

订货信息/Ordering information

芯数/Contacts	线路图/Circuit diagram
PIN位分布 M8(母)	M8381-2(带LED) M8380-2(不带LED) 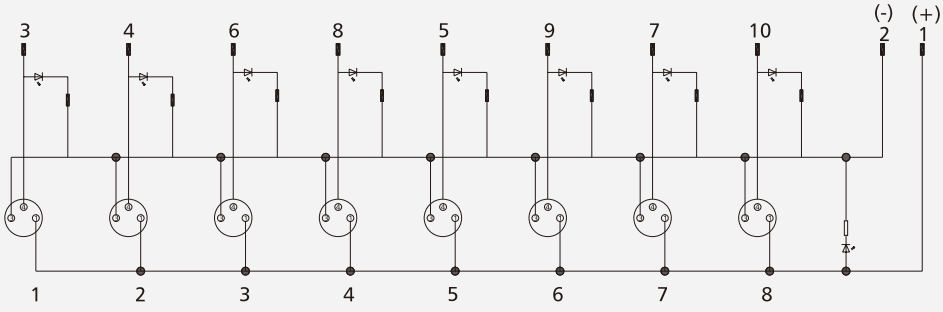
PIN位分布 M12(公)	

M8 分线盒, 6位, 带线
Junction Box, 6 Ports, M8 Termination, Molded cable

RoHS IP67

技术参数/Technical data

适用温度/Ambient temperature	-40°C ~ +80°C(静态温度/fixed installation);
	-20°C ~ +80°C(动态温度/flexible installation)
胶芯材料/Connector insert	TPU
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
主体材料/Connector body	PBT
螺丝/螺母材料/Contactor nut/screw	黄铜镀镍/Brass with nickel plated
主体颜色/Body color	蓝/blue
密封材料/Seal	氟橡胶/FKM
接触阻抗/Contact resistance	≤3mΩ
额定电压 带/不带LED with/without LED	10~30/120V
额定电流/Rated current	1A(信号/Per signal)，3A(总电流/Total)
LED颜色/LED Color	可定制/Optional
防护等级/IP rating	IP67（锁紧状态/in locked condition）

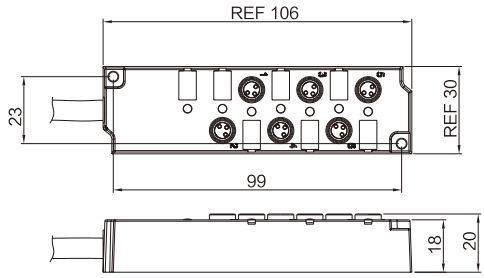

订货信息/Ordering information

芯数/Contacts	线路图/Circuit diagram	线材规格/ Cable specification	型号/Model
PIN位分布 M8(母)	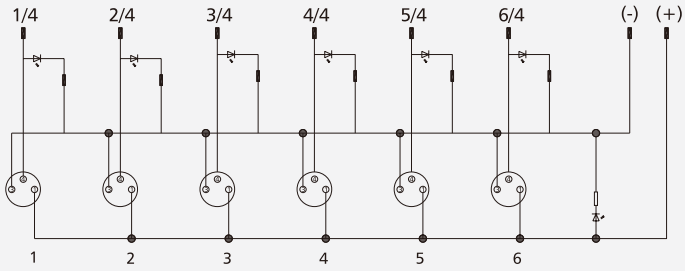	电缆: 6*0.25mm2(24AWG) 2*0.5mm2(20AWG) PUR/PVC 外披, 可定制	M8361-1/XX(带LED) M8360-1/XX(不带LED)

M8 分线盒, 6位, 带M12
Junction Box, 6 Ports, M8 Termination, With M12 Connector

RoHS IP67

技术参数/Technical data

适用温度/Ambient temperature	-25℃ ~ +80℃
胶芯材料/Connector insert	TPU
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
主体材料/Connector body	PBT
螺丝/螺母材料/Contactor nut/screw	黄铜镀镍/Brass with nickel plated
主体颜色/Body color	蓝/blue
密封材料/Seal	氟橡胶/FKM
接触阻抗/Contact resistance	≤3mΩ
额定电压 带/不带LED with/without LED	10~30/120V
额定电流/Rated current	1A(信号/Per signal)，3A(总电流/Total)
LED颜色/LED Color	可定制/Optional
防护等级/IP rating	IP67（锁紧状态/in locked condition）

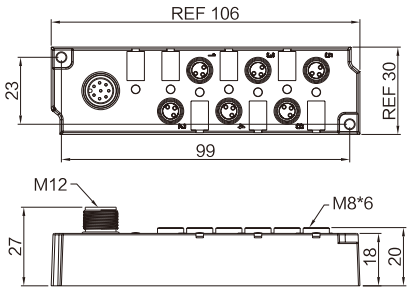

订货信息/Ordering information

芯数/Contacts	线路图/Circuit diagram
PIN位分布 M8(母)	M8361-2(带LED) M8360-2(不带LED) 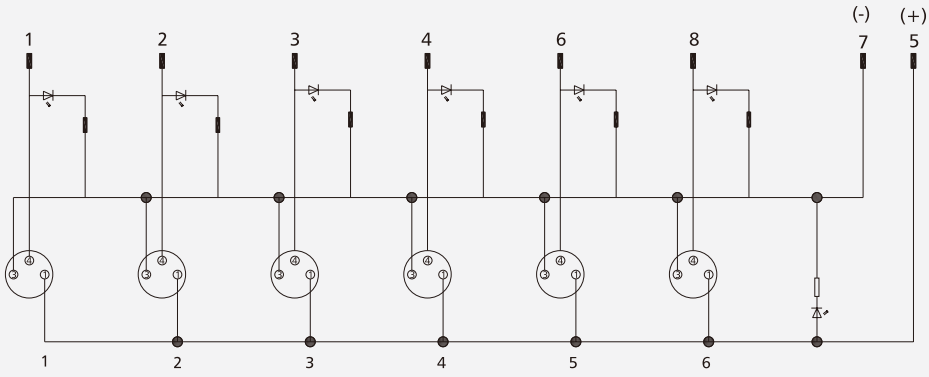
PIN位分布 M12(公)	

M8 分线盒, 4位, 带线
Junction Box, 4 Ports, M8 Termination, Molded cable

RoHS IP67

技术参数/Technical data

适用温度/Ambient temperature	-40°C ~ +80°C(静态温度/fixed installation);
	-20°C ~ +80°C(动态温度/flexible installation)
胶芯材料/Connector insert	TPU
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
主体材料/Connector body	PBT
螺丝/螺母材料/Contactor nut/screw	黄铜镀镍/Brass with nickel plated
主体颜色/Body color	蓝/blue
密封材料/Seal	氟橡胶/FKM
接触阻抗/Contact resistance	≤3mΩ
额定电压 带/不带LED with/without LED	10~30/120V
额定电流/Rated current	1A(信号/Per signal)，3A(总电流/Total)
LED颜色/LED Color	可定制/Optional
防护等级/IP rating	IP67（锁紧状态/in locked condition）

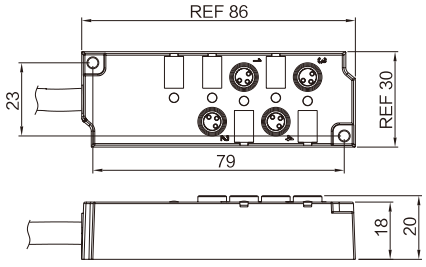

订货信息/Ordering information

芯数/Contacts	线路图/Circuit diagram	线材规格/ Cable specification	型号/Model
PIN位分布 M8(母)	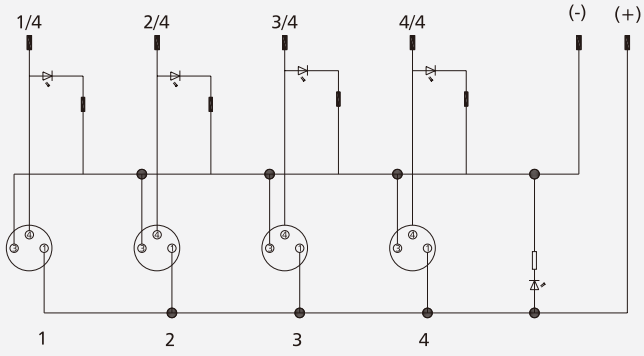	电缆: 4*0.25mm2(24AWG) 2*0.5mm2(20AWG) PUR/PVC 外披, 可定制	M8341-1/XX(带LED) M8340-1/XX(不带LED)

M8 分线盒, 4位, 带M12
Junction Box, 4 Ports, M8 Termination, With M12 Connector

RoHS IP67

技术参数/Technical data

适用温度/Ambient temperature	-25℃ ~ +80℃
胶芯材料/Connector insert	TPU
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
主体材料/Connector body	PBT
螺丝/螺母材料/Contactor nut/screw	黄铜镀镍/Brass with nickel plated
主体颜色/Body color	蓝/blue
密封材料/Seal	氟橡胶/FKM
接触阻抗/Contact resistance	≤5mΩ
额定电压 带/不带LED with/without LED	10~30/120V
额定电流/Rated current	2A(信号/Per signal)，6A(总电流/Total)
LED颜色/LED Color	可定制/Optional
防护等级/IP rating	IP67（锁紧状态/in locked condition）

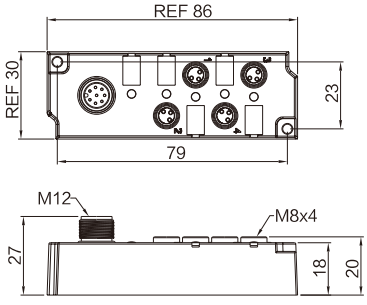

订货信息/Ordering information

芯数/Contacts	线路图/Circuit diagram
PIN位分布 M8(母)	M8341-2(带LED) M8340-2(不带LED) 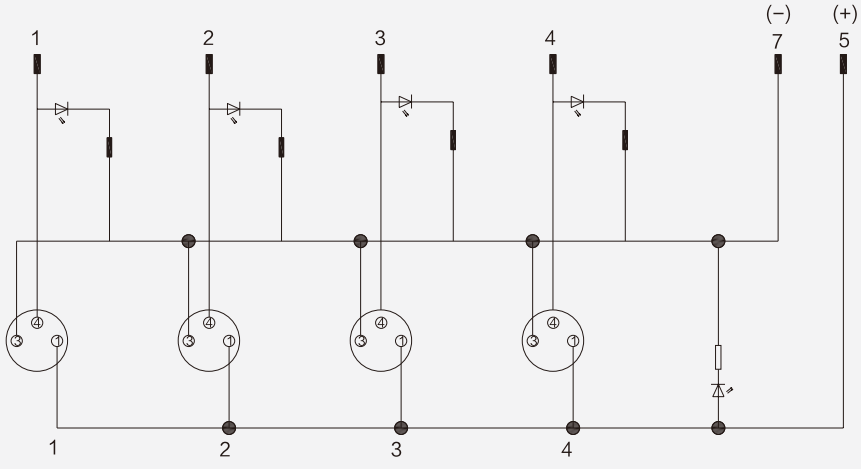
PIN位分布 M12(公)	