


M23信号类, 面板式, 焊接型, 前锁, 公胶芯+公螺纹
M23 Signal Panel Mount , Solder, Front mount,
Male Housing+Male Thread

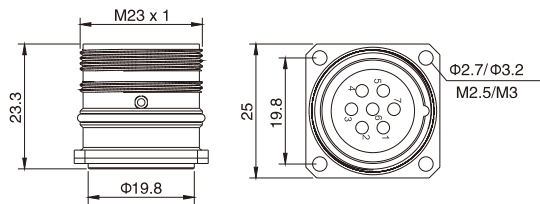

技术参数/Technical data


胶芯材料/Connector insert	PA
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Connector nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	FKM/NBR
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
适用温度/Ambient temperature	-40℃ ~ +125℃
插拔次数/Mating endurance	>800次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)
组装指南/Assembly instruction	参照P324~P330
钻孔尺寸/Panel cut-out	参照P331

订货信息/Ordering information

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
6A	2		S-M23STSMH06C-FLQ-A
7A	2		S-M23STSMH07C-FLQ-A
9A (8+1)	8		S-M23STSMH09C-FLQ-A
	1		
9B (8+1)	8		S-M23STSMH09C-FLQ-B
	1		
9C (6+3)	6		S-M23STSMH09C-FLQ-C
	3		
16A	1		S-M23STSMH16C-FLQ-A

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
12A (标准/ Standard)	1		E-M23STSMH12C-FLQ-A
12B (相反/ Opposite)	1		E-M23STSMH12C-FLQ-B
17A (标准/ Standard)	1		S-M23STSMH17C-FLQ-A
17B (相反/ Opposite)	1		S-M23STSMH17C-FLQ-B
19A (16+3)	16		S-M23STSMH19C-FLQ-A
	3		

M23信号类, 面板式, 焊接型, 前锁, 母胶芯+公螺纹
M23 Signal Panel Mount , Solder, Front mount, Female Housing+Male Thread

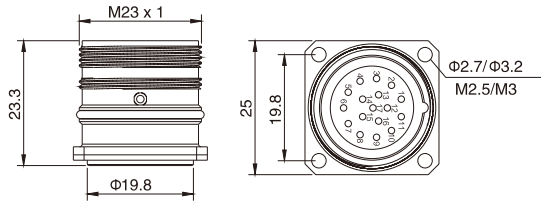

技术参数/Technical data


胶芯材料/Connector insert	PA
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Connector nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	FKM/NBR
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
适用温度/Ambient temperature	-40℃ ~ +125℃
插拔次数/Mating endurance	>800次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)
组装指南/Assembly instruction	参照P324~P330
钻孔尺寸/Panel cut-out	参照P331

订货信息/Ordering information

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
6A	2		S-M23STSFH06C-FLQ-A
7A	2		S-M23STSFH07C-FLQ-A
9A (8+1)	8		S-M23STSFH09C-FLQ-A
	1		
9B (8+1)	8		S-M23STSFH09C-FLQ-B
	1		
9C (6+3)	6		S-M23STSFH09C-FLQ-C
	3		
16A	1		S-M23STSFH16C-FLQ-A

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
12A (标准/ Standard)	1		E-M23STSFH12C-FLQ-A
12B (相反/ Opposite)	1		E-M23STSFH12C-FLQ-B
17A (标准/ Standard)	1		S-M23STSFH17C-FLQ-A
17B (相反/ Opposite)	1		S-M23STSFH17C-FLQ-B
19A (16+3)	16		S-M23STSFH19C-FLQ-A
	3		

M23信号类, 面板式, 焊接型, 后锁, 公胶芯+公螺纹
M23 Signal Panel Mount , Solder, Rear mount, Male Housing+Male Thread

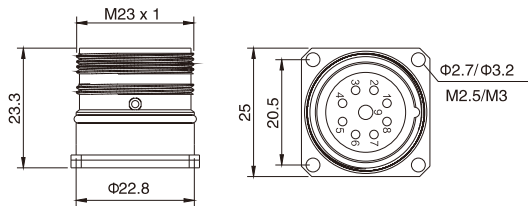

技术参数/Technical data


胶芯材料/Connector insert	PA
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Contactor nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	FKM/NBR
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
适用温度/Ambient temperature	-40°C ~ +125°C
插拔次数/Mating endurance	>800次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)
组装指南/Assembly instruction	参照P324~P330
钻孔尺寸/Panel cut-out	参照P331

订货信息/Ordering information

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
6A	2		S-M23STSMH06C-FLH-A
7A	2		S-M23STSMH07C-FLH-A
9A (8+1)	8		S-M23STSMH09C-FLH-A
	1		
9B (8+1)	8		S-M23STSMH09C-FLH-B
	1		
9C (6+3)	6		S-M23STSMH09C-FLH-C
	3		
16A	1		S-M23STSMH16C-FLH-A

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
12A (标准/ Standard)	1		E-M23STSMH12C-FLH-A
12B (相反/ Opposite)	1		E-M23STSMH12C-FLH-B
17A (标准/ Standard)	1		S-M23STSMH17C-FLH-A
17B (相反/ Opposite)	1		S-M23STSMH17C-FLH-B
19A (16+3)	16		S-M23STSMH19C-FLH-A
	3		

M23信号类, 面板式, 焊接型, 后锁, 母胶芯+公螺纹
M23 Signal Panel Mount , Solder, Rear mount, Female Housing+Male Thread

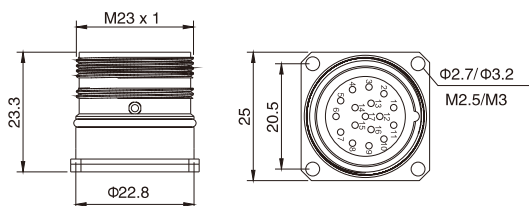

技术参数/Technical data


胶芯材料/Connector insert	PA
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Connector nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	FKM/NBR
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
适用温度/Ambient temperature	-40℃ ~ +125℃
插拔次数/Mating endurance	>800次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)
组装指南/Assembly instruction	参照P324~P330
钻孔尺寸/Panel cut-out	参照P331

订货信息/Ordering information

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
6A	2		S-M23STS06C-FLH-A
7A	2		S-M23STS07C-FLH-A
9A (8+1)	8		S-M23STS09C-FLH-A
	1		S-M23STS09C-FLH-A
9B (8+1)	8		S-M23STS09C-FLH-B
	1		S-M23STS09C-FLH-B
9C (6+3)	6		S-M23STS09C-FLH-C
	3		S-M23STS09C-FLH-C
16A	1		S-M23STS16C-FLH-A

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
12A (标准/ Standard)	1		E-M23STS12C-FLH-A
12B (相反/ Opposite)	1		E-M23STS12C-FLH-B
17A (标准/ Standard)	1		S-M23STS17C-FLH-A
17B (相反/ Opposite)	1		S-M23STS17C-FLH-B
19A (16+3)	16		S-M23STS19C-FLH-A
	3		S-M23STS19C-FLH-A

M23信号类, 面板式, 焊接型, 后锁, 公胶芯+公螺纹
M23 Signal Panel Mount , Solder, Rear mount, Male Housing+Male Thread



技术参数/Technical data


胶芯材料/Connector insert	PA
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Connector nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	FKM/NBR
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
适用温度/Ambient temperature	-40°C ~ +125°C
插拔次数/Mating endurance	>800次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)
组装指南/Assembly instruction	参照P324~P330
钻孔尺寸/Panel cut-out	参照P331

订货信息/Ordering information

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
6A	2		S-M23STSMH06C-H-A
7A	2		S-M23STSMH07C-H-A
9A (8+1)	8		S-M23STSMH09C-H-A
	1		
9B (8+1)	8		S-M23STSMH09C-H-B
	1		
9C (6+3)	6		S-M23STSMH09C-H-C
	3		
16A	1		S-M23STSMH16C-H-A

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
12A (标准/ Standard)	1		E-M23STSMH12C-H-A
12B (相反/ Opposite)	1		E-M23STSMH12C-H-B
17A (标准/ Standard)	1		S-M23STSMH17C-H-A
17B (相反/ Opposite)	1		S-M23STSMH17C-H-B
19A (16+3)	16		S-M23STSMH19C-H-A
	3		

M23信号类, 面板式, 焊接型, 后锁, 母胶芯+公螺纹
M23 Signal Panel Mount , Solder, Rear mount, Female Housing+Male Thread



技术参数/Technical data



胶芯材料/Connector insert	PA
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Connector nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	FKM/NBR
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
适用温度/Ambient temperature	-40°C ~ +125°C
插拔次数/Mating endurance	>800次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)
组装指南/Assembly instruction	参照P324~P330
钻孔尺寸/Panel cut-out	参照P331

订货信息/Ordering information

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
6A	2		S-M23STSFH06C-H-A
7A	2		S-M23STSFH07C-H-A
9A (8+1)	8		S-M23STSFH09C-H-A
	1		
9B (8+1)	8		S-M23STSFH09C-H-B
	1		
9C (6+3)	6		S-M23STSFH09C-H-C
	3		
16A	1		S-M23STSFH16C-H-A

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
12A (标准/ Standard)	1		E-M23STSFH12C-H-A
12B (相反/ Opposite)	1		E-M23STSFH12C-H-B
17A (标准/ Standard)	1		S-M23STSFH17C-H-A
17B (相反/ Opposite)	1		S-M23STSFH17C-H-B
19A (16+3)	16		S-M23STSFH19C-H-A
	3		

M23信号类, 面板式, 焊接型, 前锁, 公胶芯+公螺纹
M23 Signal Panel Mount , Solder, Front mount, Male Housing+Male Thread

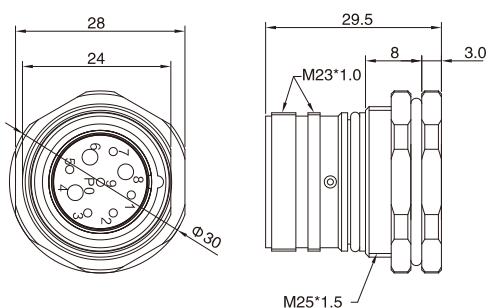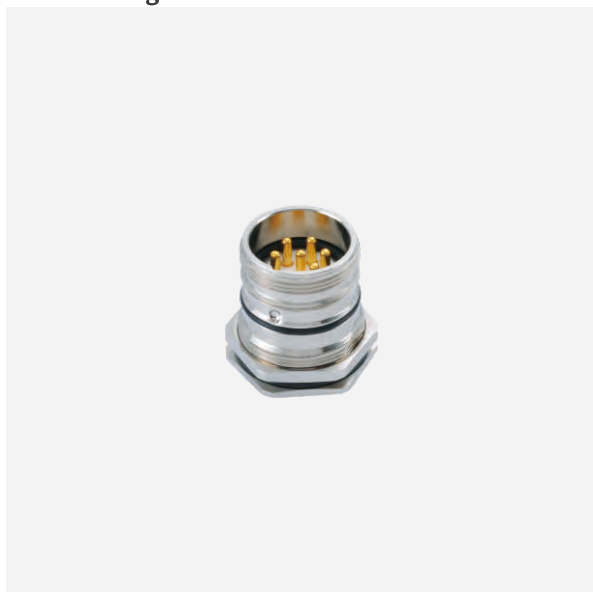

技术参数/Technical data


胶芯材料/Connector insert	PA
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Connector nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	FKM/NBR
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
适用温度/Ambient temperature	-40℃ ~ +125℃
插拔次数/Mating endurance	>800次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)
组装指南/Assembly instruction	参照P324~P330
钻孔尺寸/Panel cut-out	参照P331

订货信息/Ordering information

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
6A	2		S-M23STSMH06C-Q-A
7A	2		S-M23STSMH07C-Q-A
9A (8+1)	8		S-M23STSMH09C-Q-A
	1		
9B (8+1)	8		S-M23STSMH09C-Q-B
	1		
9C (6+3)	6		S-M23STSMH09C-Q-C
	3		
16A	1		S-M23STSMH16C-Q-A

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
12A (标准/ Standard)	1		E-M23STSMH12C-Q-A
12B (相反/ Opposite)	1		E-M23STSMH12C-Q-B
17A (标准/ Standard)	1		S-M23STSMH17C-Q-A
17B (相反/ Opposite)	1		S-M23STSMH17C-Q-B
19A (16+3)	16		S-M23STSMH19C-Q-A
	3		

M23信号类, 面板式, 焊接型, 前锁, 母胶芯+公螺纹
M23 Signal Panel Mount , Solder, Front mount, Female Housing+Male Thread

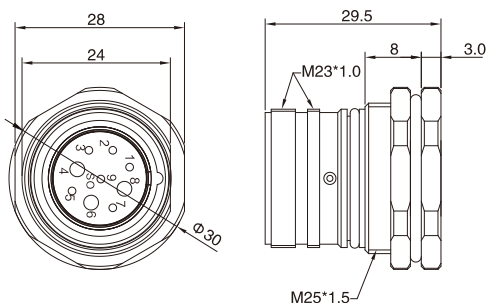

技术参数/Technical data


胶芯材料/Connector insert	PA
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Connector nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	FKM/NBR
绝缘阻抗/Insulation resistance	$\geq 100M\Omega$
接触阻抗/Contact resistance	$\leq 5m\Omega$
适用温度/Ambient temperature	$-40^{\circ}C \sim +125^{\circ}C$
插拔次数/Mating endurance	>800次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)
组装指南/Assembly instruction	参照P324~P330
钻孔尺寸/Panel cut-out	参照P331

订货信息/Ordering information

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
6A	2		S-M23STSFH06C-Q-A
7A	2		S-M23STSFH07C-Q-A
9A (8+1)	8		S-M23STSFH09C-Q-A
	1		
9B (8+1)	8		S-M23STSFH09C-Q-B
	1		
9C (6+3)	6		S-M23STSFH09C-Q-C
	3		
16A	1		S-M23STSFH16C-Q-A

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
12A (标准/ Standard)	1		E-M23STSFH12C-Q-A
12B (相反/ Opposite)	1		E-M23STSFH12C-Q-B
17A (标准/ Standard)	1		S-M23STSFH17C-Q-A
17B (相反/ Opposite)	1		S-M23STSFH17C-Q-B
19A (16+3)	16		S-M23STSFH19C-Q-A
	3		

M23信号类, 面板式, PCB型, 前锁, 公胶芯+公螺纹
M23 Signal Panel Mount , Solder, Front mount,
Male Housing+Male Thread

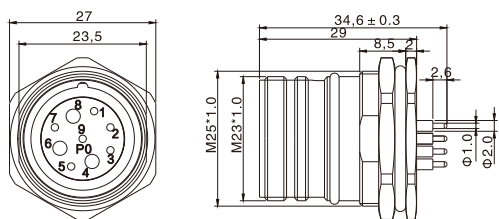

技术参数/Technical data



胶芯材料/Connector insert	PA
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Connector nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	FKM/NBR
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
适用温度/Ambient temperature	-40°C ~ +125°C
插拔次数/Mating endurance	>800次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)
组装指南/Assembly instruction	参照P324~P330
钻孔尺寸/Panel cut-out	参照P331

订货信息/Ordering information

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
6A	2		S-M23STSMP06C-Q-A
7A	2		S-M23STSMP07C-Q-A
9A (8+1)	8		S-M23STSMP09C-Q-A
	1		
9B (8+1)	8		S-M23STSMP09C-Q-B
	1		
9C (6+3)	6		S-M23STSMP09C-Q-C
	3		
16A	1		S-M23STSMP16C-Q-A

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
12A (标准/ Standard)	1		E-M23STSMP12C-Q-A
12B (相反/ Opposite)	1		E-M23STSMP12C-Q-B
17A (标准/ Standard)	1		S-M23STSMP17C-Q-A
17B (相反/ Opposite)	1		S-M23STSMP17C-Q-B
19A (16+3)	16		S-M23STSMP19C-Q-A
	3		

M23信号类, 面板式, PCB型, 前锁, 母胶芯+公螺纹
M23 Signal Panel Mount , Solder, Front mount,
Female Housing+Male Thread

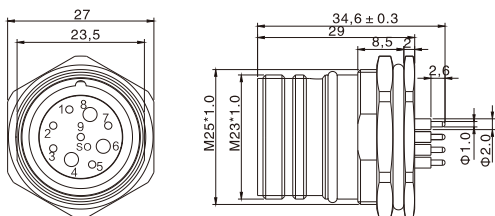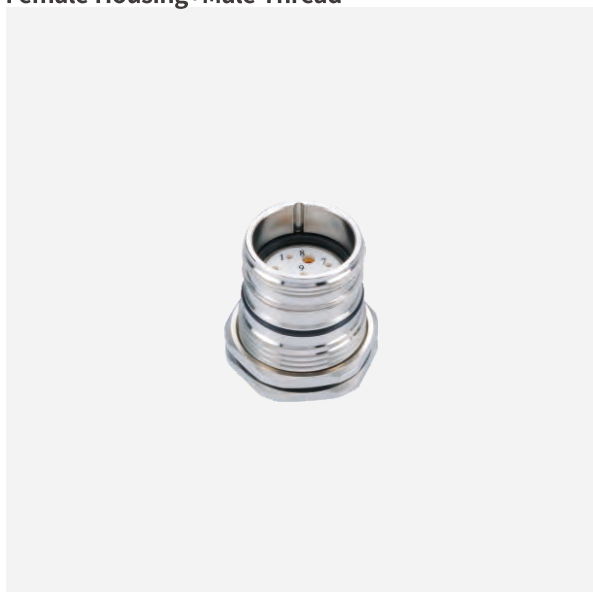

技术参数/Technical data


胶芯材料/Connector insert	PA
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Connector nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	FKM/NBR
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
适用温度/Ambient temperature	-40℃ ~ +125℃
插拔次数/Mating endurance	>800次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)
组装指南/Assembly instruction	参照P324~P330
钻孔尺寸/Panel cut-out	参照P331

订货信息/Ordering information

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
6A	2		S-M23STSP06C-Q-A
7A	2		S-M23STSP07C-Q-A
9A (8+1)	8		S-M23STSP09C-Q-A
	1		
9B (8+1)	8		S-M23STSP09C-Q-B
	1		
9C (6+3)	6		S-M23STSP09C-Q-C
	3		
16A	1		S-M23STSP16C-Q-A

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
12A (标准/ Standard)	1		E-M23STSP12C-Q-A
12B (相反/ Opposite)	1		E-M23STSP12C-Q-B
17A (标准/ Standard)	1		S-M23STSP17C-Q-A
17B (相反/ Opposite)	1		S-M23STSP17C-Q-B
19A (16+3)	16		S-M23STSP19C-Q-A
	3		

M23信号类, 面板式, PCB型, 前锁, 公胶芯+公螺纹
M23 Signal Panel Mount , Solder, Front mount,
Male Housing+Male Thread

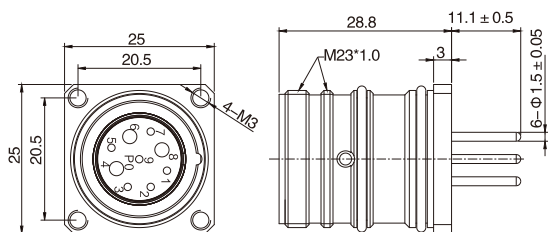

技术参数/Technical data


胶芯材料/Connector insert	PA
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Connector nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	FKM/NBR
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
适用温度/Ambient temperature	-40℃ ~ +125℃
插拔次数/Mating endurance	>800次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)
组装指南/Assembly instruction	参照P324~P330
钻孔尺寸/Panel cut-out	参照P331

订货信息/Ordering information

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
6A	2		S-M23STSMP06C-FLQ-A
7A	2		S-M23STSMP07C-FLQ-A
9A (8+1)	8		S-M23STSMP09C-FLQ-A
	1		
9B (8+1)	8		S-M23STSMP09C-FLQ-B
	1		
9C (6+3)	6		S-M23STSMP09C-FLQ-C
	3		
16A	1		S-M23STSMP16C-FLQ-A

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
12A (标准/ Standard)	1		E-M23STSMP12C-FLQ-A
12B (相反/ Opposite)	1		E-M23STSMP12C-FLQ-B
17A (标准/ Standard)	1		S-M23STSMP17C-FLQ-A
17B (相反/ Opposite)	1		S-M23STSMP17C-FLQ-B
19A (16+3)	16		S-M23STSMP19C-FLQ-A
	3		

M23信号类, 面板式, PCB型, 前锁, 母胶芯+公螺纹
M23 Signal Panel Mount , Solder, Front mount, Female Housing+Male Thread

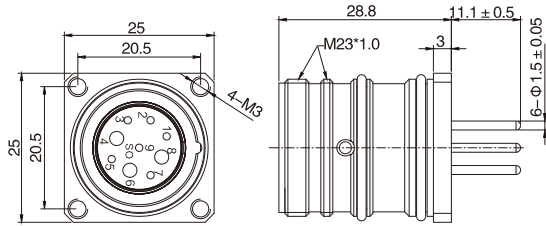

技术参数/Technical data



胶芯材料/Connector insert	PA
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Connector nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	FKM/NBR
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
适用温度/Ambient temperature	-40℃ ~ +125℃
插拔次数/Mating endurance	>800次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)
组装指南/Assembly instruction	参照P324~P330
钻孔尺寸/Panel cut-out	参照P331

订货信息/Ordering information

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
6A	2		S-M23STSFP06C-FLQ-A
7A	2		S-M23STSFP07C-FLQ-A
9A (8+1)	8		S-M23STSFP09C-FLQ-A
	1		
9B (8+1)	8		S-M23STSFP09C-FLQ-B
	1		
9C (6+3)	6		S-M23STSFP09C-FLQ-C
	3		
16A	1		S-M23STSFP16C-FLQ-A

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
12A (标准/ Standard)	1		E-M23STSFP12C-FLQ-A
12B (相反/ Opposite)	1		E-M23STSFP12C-FLQ-B
17A (标准/ Standard)	1		S-M23STSFP17C-FLQ-A
17B (相反/ Opposite)	1		S-M23STSFP17C-FLQ-B
19A (16+3)	16		S-M23STSFP19C-FLQ-A
	3		

M23信号类, 面板式, 压接型, 前锁, 公胶芯+公螺纹
M23 Signal Panel Mount , Crimp, Front mount, Male Housing+Male Thread

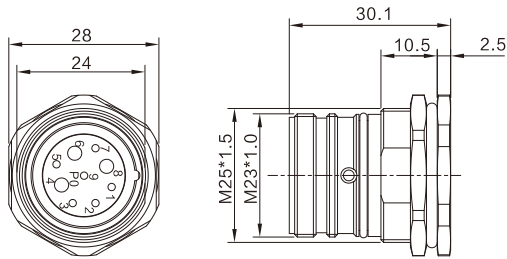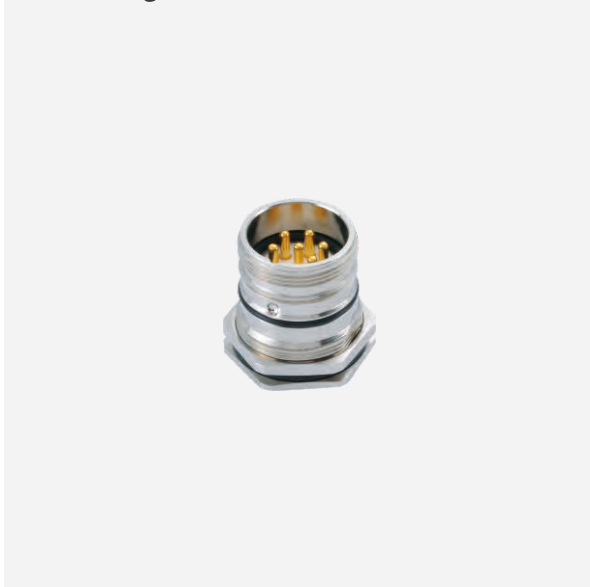

技术参数/Technical data



胶芯材料/Connector insert	PA
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Connector nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	FKM/NBR
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
适用温度/Ambient temperature	-40℃ ~ +125℃
插拔次数/Mating endurance	>800次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)
组装指南/Assembly instruction	参照P324~P330
钻孔尺寸/Panel cut-out	参照P331

订货信息/Ordering information

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
6A	2		S-M23STSMY06C-Q-A
7A	2		S-M23STSMY07C-Q-A
9A (8+1)	8		S-M23STSMY09C-Q-A
	1		
9B (8+1)	8		S-M23STSMY09C-Q-B
	1		
9C (6+3)	6		S-M23STSMY09C-Q-C
	3		
16A	1		S-M23STSMY16C-Q-A

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
12A (标准/ Standard)	1		E-M23STSMY12C-Q-A
12B (相反/ Opposite)	1		E-M23STSMY12C-Q-B
17A (标准/ Standard)	1		S-M23STSMY17C-Q-A
17B (相反/ Opposite)	1		S-M23STSMY17C-Q-B
19A (16+3)	16		S-M23STSMY19C-Q-A
	3		

M23信号类, 面板式, 压接型, 前锁, 母胶芯+公螺纹
M23 Signal Panel Mount , Crimp, Front mount, Female Housing+Male Thread

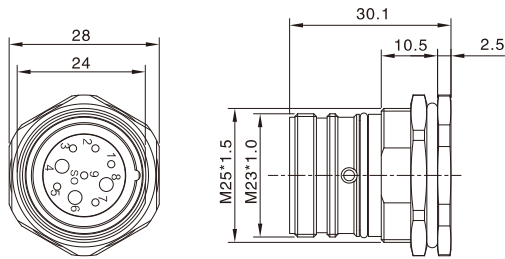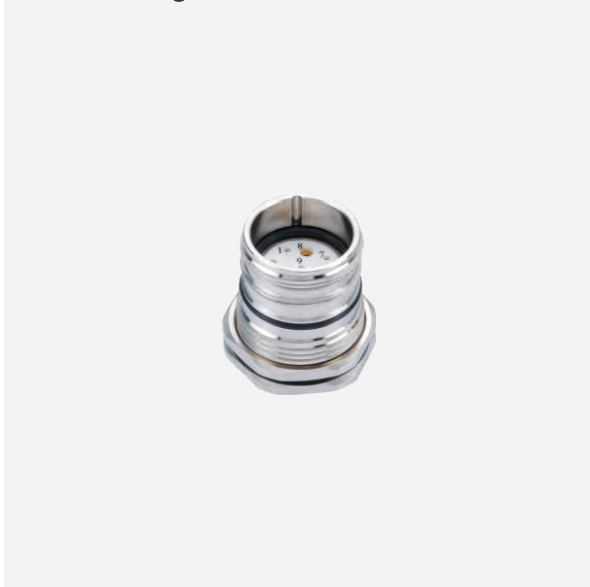

技术参数/Technical data

胶芯材料/Connector insert	PA
端子材料/Connector contacts	黄铜镀金/Brass with gold plated
螺丝/螺母材料/Connector nut/screw	黄铜镀镍/Brass with nickel plated
密封材料/密封圈/Seal/O-ring	FKM/NBR
绝缘阻抗/Insulation resistance	≥100MΩ
接触阻抗/Contact resistance	≤5mΩ
适用温度/Ambient temperature	-40℃ ~ +125℃
插拔次数/Mating endurance	>800次/Cycles
防护等级/IP rating	IP68 (锁紧状态/in locked condition)
组装指南/Assembly instruction	参照P324~P330
钻孔尺寸/Panel cut-out	参照P331

订货信息/Ordering information

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
6A	2		S-M23STSFY06C-Q-A
7A	2		S-M23STSFY07C-Q-A
9A (8+1)	8		S-M23STSFY09C-Q-A
	1		
9B (8+1)	8		S-M23STSFY09C-Q-B
	1		
9C (6+3)	6		S-M23STSFY09C-Q-C
	3		
16A	1		S-M23STSFY16C-Q-A

芯数/ Contacts	端子外径/ Contact OD	公针/ Pin	型号/Model
12A (标准/ Standard)	1		E-M23STSFY12C-Q-A
12B (相反/ Opposite)	1		E-M23STSFY12C-Q-B
17A (标准/ Standard)	1		S-M23STSFY17C-Q-A
17B (相反/ Opposite)	1		S-M23STSFY17C-Q-B
19A (16+3)	16		S-M23STSFY19C-Q-A
	3		